

## Replace unreliable sensors & cut maintenance costs.



The Q22 Specialty pH/ORP sensors are designed for use with all non-ATI analyzer systems and generic panel meters, allowing these end users to utilize the same robust features of the standard ATI Q25 sensors. The sensors are classified as either Universal or Loop-Powered, depending on the output selected.

The Universal sensors emulate standard, non-amplified combination sensors and are designed to interface with all non-ATI pH/ORP analyzers. The sensors require no power supply as the preamplifier is powered by an internal lithium battery. The pH sensor outputs a mV signal in the range of either -500 to +500 mV or 0 to 2 VDC; both are linear over the 0 to 14 pH range. The ORP sensor outputs a mV signal that

ranges from -1000 to +1000 mV. These sensors may be used as replacement sensors for use with all non-Quantum analyzers.

The Loop-powered sensors require an external 7-30 VDC power supply and provide a 4-20 mA output signal for direct connection to generic panel meters, data acquisition systems, or other devices that accept a current input. The sensor includes integral temperature compensation of the pH signal, so no temperature output is provided. The sensor output is uncalibrated, therefore, the receiving instrument must be capable of providing user calibration of the pH or ORP signal on a periodic basis.

## System Features

**Differential-Style Sensor:** The reference element is a second glass pH electrode immersed in a reference buffer solution. This glass reference system allows the sensor to be used in applications that poison conventional pH or ORP sensors.

**PEEK® or 316SS Sensor Body Construction:** All sensor housings are constructed of either PEEK®, a high performance thermoplastic that provides outstanding mechanical strength and chemical resistance, or 316 stainless steel.

**Replaceable Sensor Saltbridge:** A large volume, dual junction saltbridge is used to maximize the in-service time of the sensor. The replaceable saltbridge allows for easy and inexpensive sensor regeneration.

**Integral Preamplifier:** The integral preamplifier is encapsulated in the body of the sensor. This creates a low impedance signal output which ensures stable readings in harsh environments, and maximizes the distance between sensor and analyzer.

**Multiple Electrode Types:** Sensor electrodes are user-specified to ensure measurement reliability and maximum sensor lifetime. The type of pH electrode can be selected for optimal performance. The metal ORP electrode is either platinum or gold, depending on the process chemicals.

## Model Q22 Sensor Specifications

Measuring Range:	0 to 14 pH; 0 to +1000 mV or $\pm 1000$ mV
Sensitivity:	0.002 pH; 0.2 mV
Stability:	0.02 pH; 2 mV (per 24 hours, non-cumulative)
Wetted Materials	PEEK®, ceramic, titanium, glass, Viton®, EDPM Platinum or Gold : ORP 316 Stainless Steel with sanitary or insertion body styles
Temperature Compensation:	Pt100 or Pt1000 RTD
Sensor Cable:	6 conductor plus 2 shields, HDPE Jacket
Temperature Range:	-5 to 95°C (23 to 203°C)
Pressure Range:	0 to 100 psig
Max. Flow Rate:	10 feet (3 meters) per second
Max. Sensor to Analyzer Distance:	3000 feet (914 meters): Universal 1000 feet (305 meters): Loop powered
Sensor Body Options:	1" NPT convertible 1¼" insertion 1½" or 2" sanitary-style
Shipping Weight:	1 pound (0.45 kilogram)

## Ordering Information: Model Q22-A-B-C-D-E Sensor

### Suffix A - Electrode Type

- P1 - pH: Industrial glass
- P2 - pH: Municipal glass
- P3 - pH: Antimony metal (HF use only)
- R1 - ORP: Platinum metal
- R2 - ORP: Gold metal

### Suffix B - Temperature Compensation Element

- 1 - Integral
- 2 - Pt 1000
- 3 - Pt 100

### Suffix C - Output

- 1 -  $\pm 500$  mV (pH); 0 - 1000 mV (ORP)
- 2 - 0 to 2 VDC
- 3 - 4 to 20 mA

### Suffix D - Sensor style

- 1 - Convertible-style, PEEK
- 2 - Insertion-style, 316SS
- 3 - 1½" Sanitary-style, 316SS
- 4 - 2" Sanitary-style, 316SS
- 5 - Convertible with quick-disconnect receptacle

### Suffix E - Sensor or cable length

- 1 - 15 feet
- 2 - 30 feet
- 9 - Special

### Options:


- 05-0057 Sensor regeneration kit (P1, R1, R2)
- 05-0067 Sensor regeneration kit (P2)
- 09-0034 pH 4.00 buffer, 1000 mL
- 09-0035 pH 7.00 buffer, 1000 mL
- 09-0036 pH 10.00 buffer, 1000 mL
- 09-0042 200 mV solution, 500 mL
- 09-0043 600 mV solution, 500 mL
- 05-0056 Quinhydrone powder, 5 grams
- 00-0048 Junction box
- 07-0100 NEMA 4X junction box
- 31-0057 Sensor interconnect cable

## Notes

1. Insertion & Sanitary Styles must use 316 SS body material and are only available in these sensor styles.
2. Sensor with integral connector is not waterproof and is for indoor use only.
3. Suffix D-5 requires sensor cable P/N 03-0029



### Represented By:

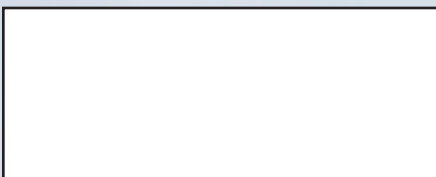

Analytical Technology, Inc.  
6 Iron Bridge Drive  
Collegeville, PA 19426  
Phone: 610/917-0991 • Toll-Free: 800/959-0299  
Fax: 610/917-0992  
E-Mail: sales@analyticaltechnology.com

Analytical Technology  
Unit 1 and 2 Gatehead Business Park  
Delph New Road, Delph  
Saddleworth OL3 5DE  
Phone: +44 (0) 1457 873 318  
Fax: +44 (0) 1457 874 468  
E-Mail: sales@atiuk.com