


ANDERSON GREENWOOD FCA FLOW CHECK ADAPTER

A rotatable connecting adaptor used with static pressure measuring instruments which, in the event of the instrument rupturing, closes automatically as a result of the process medium flow

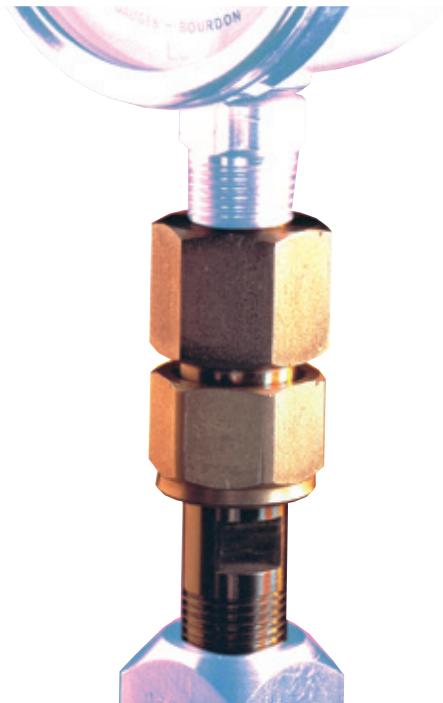

FEATURES

- Seals off the flow when activated by escaping gas or liquid.
- Automatically resets when flow conditions cease or the instrument is replaced.
- Integral restricted orifice acts as a pulsation damper reducing damage to sensitive instruments.
- Rotatable adapter option allows 360° positioning of gauges and instruments.
- Integral siphon for steam service provides a protective condensate barrier to prevent live steam from damaging instruments.
- Robust and compact design allows rigid installation of gauges and instruments.

GENERAL APPLICATION

The FCA is designed for flow prevention, pressure snubbing, as a gauge siphon for steam service and for hazardous service including toxic, flammable and high pressure duties, providing extra protection for personnel and the environment.

TECHNICAL DATA

Materials:	SS, Monel
Seats:	Metal or soft
Connections:	½" NPT
Pressure (max.):	10000 psig (690 barg)
Temperature (max.):	1000°F (538°C)

ANDERSON GREENWOOD FCA FLOW CHECK ADAPTER

PRODUCT DESCRIPTION

The FCA is available in SS with the option of Monel®. Connections are available 1/2-inch NPT male x female as standard. Suitable for pressures up to 10000 psig (690 barg) and temperatures 1000°F (538°C), the FCA is available with trim to meet the requirements of NACE.

Installation⁽¹⁾

Pressure gauges or instruments may be installed directly onto the flow check adapter which in turn can be connected to the gauge/isolation valve. Alternatively, the adapter can be installed directly onto the primary/root isolation valve providing complete protection for the impulse line and subsidiary instruments and gauges.

STANDARD MATERIALS

Adapter	Body
SS	SS A479 316
Monel®	Monel® 400

PRESSURE AND TEMPERATURE RATINGS


Standard - metal seat (maximum)	Soft seat option (maximum)
10000 psig 1000°F (690 barg) (538°C)	464°F (240°C)

SELECTION GUIDE

Example:	FCA	S	-4	x4	-SG
Materials of construction					
S	SS				
M	Monel®				
Gauge connection					
4	1/2 inch FNPT				
Process connection					
4	1/2 inch MNPT				
Options					
-OC	Oxygen cleaning				
-SG	(Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions < 50 mg/l [ppm]) and NACE MR0103-2005				
-SH	Soft seated				

NOTES

1. The FCA should be used in the vertical position, placing the gauge connection above the process connection.
2. Minimal leakage will occur to equalize the pressure to enable resetting the FCA when instrument has been replaced.
3. Approximate adapter weight: 0.66 lb (0.3 kg).

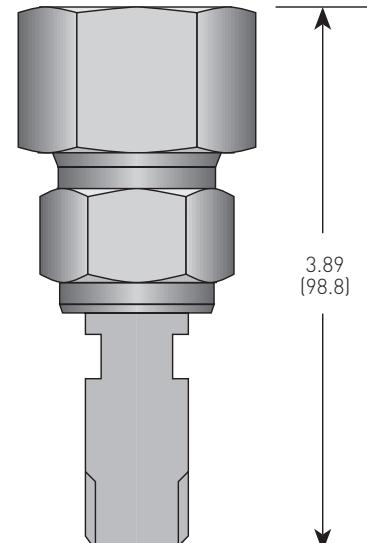

Dimension, inches (mm)

Neither Emerson, Emerson Automation Solutions, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

Anderson Greenwood is a mark owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson Automation Solutions, Emerson and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.