


## SURFACE THERMOMETER

The REOTEMP Surface Bimetal Thermometer measures temperature on any horizontal surface. The magnetic feet on this model snap it securely to any ferrous surface. It is commonly used on griddles, ovens, motors, piping and tanks.

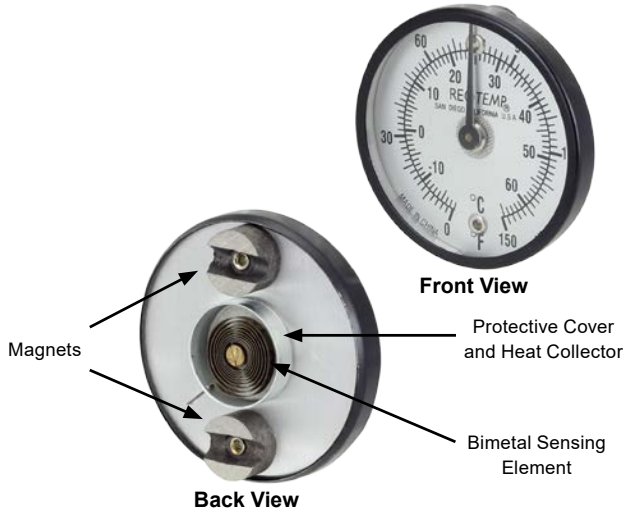

### SPECIFICATIONS

<b>Accuracy</b>	± 2% Full Scale
<b>Sensing Element</b>	Precision Calibrated Bimetal Coil
<b>Dial Size</b>	2" (5.08cm)
<b>Dial Material</b>	Aluminum background with black marks.
<b>Case</b>	Aluminum
<b>Lens</b>	Glass
<b>Height</b>	1/2" (1.27cm)
<b>Weight</b>	Approximately 2 ounces (56.7g)
<b>Response Time</b>	Approximately 1 minute.
<b>Mounting</b>	Two magnets on back.

#### TEMPERATURE RANGE

**SUR-15** = 0 to 150°F & -20 to 65°C  
**SUR-25** = 0 to 250°F & -20 to 120°C  
**SUR-50** = 0 to 500°F & -20 to 260°C  
**SUR-75** = 50 to 750°F & 10 to 400°C

#### — SUR-15

#### HOW TO ORDER

## POCKET BIMETAL THERMOMETER



### FEATURES / BENEFITS

- Accurate and Rugged
- Quick Response
- Shock Resistant
- Sensitive Bimetal Element
- External Reset Adjustment
- Waterproof and Dust Proof
- Stainless Steel or Plastic Pocket Case

### SPECIFICATIONS

<b>Accuracy</b>	± 2% Full Scale
<b>Dial Size</b>	1" Diameter (25mm)
<b>Dial Material</b>	White background with crisp letters, marks, and numbers.
<b>Stem Length</b>	142 O.D., 5" long, pointed (36mm x 127mm)
<b>Pocket Case</b>	Plastic with clip and holder loop.
<b>Lens</b>	Glass
<b>Reset Nut</b>	7/16 Hex (11mm)
<b>Weight</b>	0.65 Ounces (18.5g)
<b>Packed</b>	1 per box, 12 per carton

#### TEMPERATURE RANGE

**Fahrenheit Ranges**  
**K-79-2** = -40°F to 160°F  
**K-79-3** = 0°F to 220°F  
**K-79-4** = 25°F to 125°F  
**K-79-5** = 50°F to 550°F

#### — K-79-2

#### HOW TO ORDER

**Celsius Ranges**  
**K-79-7** = -10°C to 110°C  
**K-79-8** = 0°C to 150°C  
**K-79-9** = 0°C to 250°C