

ARCHON model KA-100 Lighting Units

Section Bulletin Issued **Page**

ARCHON model KA100 Lighting Unit

The model KA100 is for Non-Hazardous applications and is small, all stainless, reliable, efficient and universal. The model KA easily mounts to any existing sightglass and can be installed on any ARCHON type sightglass. The model KA100-CL is a clamp on unit for pharmaceutical, food and dairy applications. Both units allows for clear unobstructed viewing of vessel contents. Provides Lighting and Viewing in one sightglass.

Application:

Used on ARCHON models KB, KB-RF, KB-FT, KB-WN, SS. SS-TC and some RLB-OB models.

Can easily be adapted to an existing sightglass using a universal type bracket or clamp.




Service:


For Non-Hazardous applications only. Units are UL rated and approved. Units are equipped with a momentary on/off switch. The Lighting units operate independent of operating conditions inside of the vessel.

Electrical:

120V/ 45, 60 and 75W Halogen Bulb

Available in many configurations and also custom designed for your specific needs.



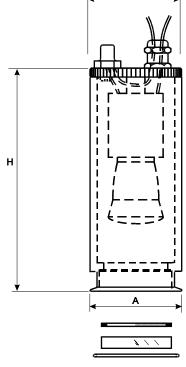

Model	D	Α	Н	Voltage	Watts
KA-100	2-1/2"	-	5-1/2"	120 ac	45, 60, 75
				220 ac	30
KA-100 CL-2	2-1/2"	2-1/2"	6"	120 ac	45, 60, 75
				220 ac	30
KA-100 CL-3	2-1/2"	3-5/8"	6-3/4"	120 ac	45, 60, 75
				220 ac	30
KA-100 CL-4	2-1/2"	4-5/8"	7"	120 ac	45, 60, 75
				220 ac	30

60 and 75 watt available only for unit with local switch